

Plastering Bead & Mesh



Masonry Reinforcement Mesh (CBR)


PROVIDE ADDED STRENGTH AND STABILITY. Galvanised or stainless steel finish. Assists resistance to tensile stresses where settlement occurs. Easily incorporated into mortar course, coiled for ease of handing.

CBR

INSTALLATION: All metal components used in any particular application must be of the same material type. Gloves should be worn to protect hands from sharp metal edges.

Position the mesh within the masonry bed joints, providing a minimum of 25mm cover to external faces. Overlap by a minimum of 75mm if joining two lengths together. The mesh can be laid every third brickwork course for most reinforcement.

Download Full PDF Version from www.strongtie.co.uk

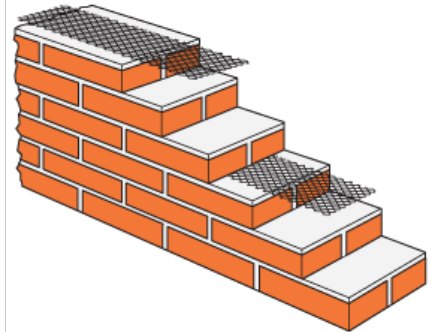

Masonry Reinforcement Mesh (CBR) Performance Data (Updated: Wednesday 19th May 2010)

Model No.		Dimensions
Galvanised	Stainless Steel	
CBR2063	CBR2063S	63mm x 20m
CBR20112	CBR20112S	112mm x 20m
CBR20175	CBR20175S	175mm x 20m
CBR20228	CBR20228S	228mm x 20m
CBR20305	-	305mm x 20m

Simpson Strong-Tie Masonry Reinforcement Mesh (CBR) details generated 19th September 2012.
Copyright 2009-2012, Simpson Strong-Tie Company Inc. All Rights Reserved

Simpson Strong-Tie, Winchester Road, Cardinal Point, Tamworth, Staffordshire, B78 3HG. Telephone: 01827 255600 | Fax: 01827 255616 | Visit: www.strongtie.co.uk